

FIXED ATTENUATOR

MVE2365-XX

DC to 40GHz

Features

- ✓ Frequency up to 40GHz
- ✓ High Accuracy
- ✓ Low VSWR



Specifications

PART NUMBER	IMPEDANCE	FREQUENCY	STANDARD VALUE	VSWR (MAX.)	AVERAGE POWER	PEAK POWER	CONNECTOR TYPE
MVE2365-XX	50 ohm	40GHz	1,2,3,5,6,8,10,20,30,40	1.3:1	2Watts	125 Watts	2.92mm

-XX: Insert dB value desired

ATTENUATION ACCURACY

- 01-07dB: ±0.6 dB MAX.
- 07-10dB: ±0.5 dB MAX.
- 20dB: ±0.6 dB MAX.
- 30dB: ±0.8 dB MAX.
- 40dB: ±1.0 dB MAX.

MATERIAL/FINISH


- BODY: PASSIVATED STAINLESS STEEL
- CONTACT: BeCu, GOLD PLATED
- INSULATORS: PTFE

ENVIRONMENTAL


TEMPERATURE RANGE: -55°C TO +125°C

TOLERANCE: ±0.5mm

Outline Drawing (Unit: mm)

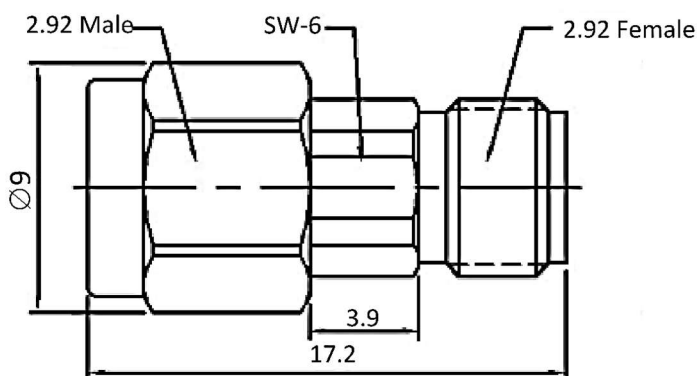

Typical Test Result (MVE2365-06)

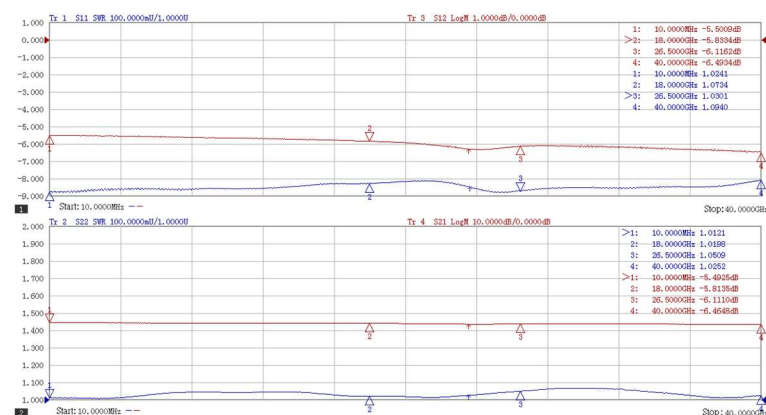

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

