


# COAXIAL CONNETTOR

# MMCX SWITCH SMT FOR PCB TYPE

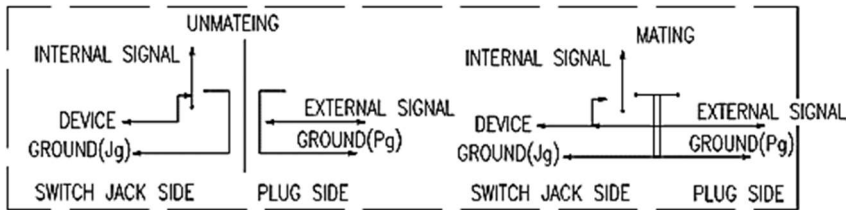


## Specifications

<b>PART NUMBER</b>	MVE3308-7.55
<b>DESCRIPTION</b>	MMCX Female Switch SMT PCB Connector,DC-6GHz

ELECTRICAL/MECHANICAL	MATERIALS
FREQUENCY: DC-6GHz IMPEDANCE: 50 OHM VSWR: 1.6:1 MAX DURABILITY: 5000 CYCLES MIN. TEMP. RANGE: -55~155	BODY: BRASS, GOLD PLATED FEMALE CONDUCTOR: Be Copper, GOLD PLATED INNER PIN:BRASS INNER PASS CONTACT:BRASS

TOLERANCE: X=±0.2 X.X=±0.1 X.XX=±0.05

## Outline Drawing (Unit: mm)

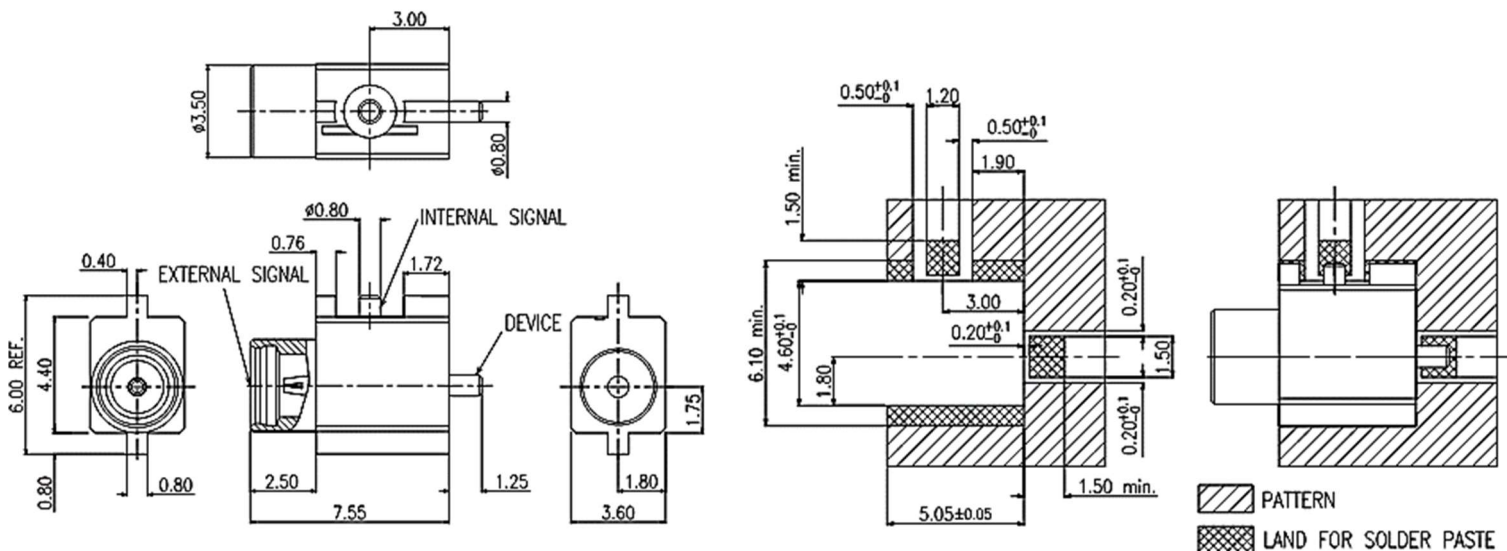

**NOTES:**

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

