芝程科技有限公司
Marvelous Microwave Inc.

COAXIAL CONNETOR

2.92mm
For PCB Type

Features

- ✓ Impedance :50ohm
- ✓ Low VSWR

Specifications

PART NUMBER	**MVE3408-9.5**
DESCRIPTION	50ohm 2.92mm Female S/T 4Hole Flange Connector

ELECTRICAL	MATERIALS
FREQUENCY: DC-40GHz IMPEDANCE: 50 OHM VSWR: 1.15:1 MAX. CONTACT RESISTANCE: CENTER CONTACT ≦3mΩ OUTER CONTACT ≦2mΩ INSULATION RESISTANCE: ≧3000MΩ DIELECTRIC WITHSTANDING VOLTAGE: 750Vrms MAX. TEMPETRAURE RANGE: -55℃ TO +165℃ DURABILITY: 500 CYCLES MIN.	BODY: STAINLESS STEEL(SU303), PASSIVATED CONTACT: BERYLLIUM BRONZE, GOLD PLATED INSULATOR: PEI, PTFE

TOLERANCE: X=±0.2 X.X=±0.1 X.XX=±0.05

Outline Drawing Unit: (mm)

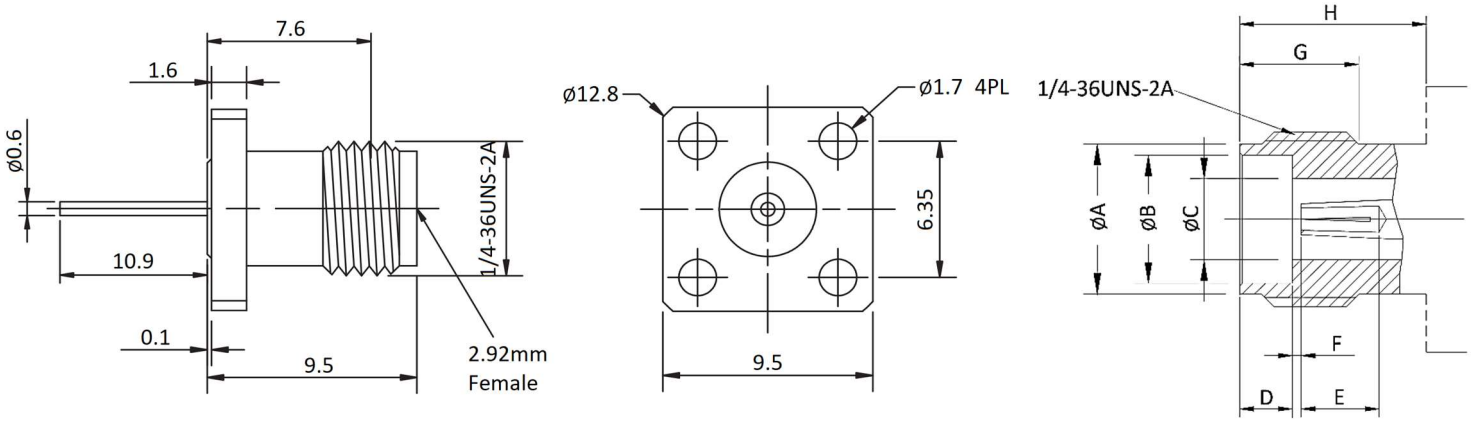

2.92mm Female		A	B	C	D	E	F	G	H
	Min	5.23	4.60	2.90	1.88	2.67	0.00	4.32	5.54
	Max	5.44	4.65	2.95	1.98	—	0.13	—	—

NOTES
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

RoHS

4F., No.258, Sec. 1, Wenhua 1st Rd., Linkou Dist., New Taipei City 244, Taiwan (R.O.C.)
www.micro-mve.com E-mail:sales@micro-mve.com Tel: +886-2-2602-0660