

POWER DIVIDER

Resistive SMA Type DC-8GHz 8WAY

Features

- ✓ Frequency up to 8GHz
- ✓ Low Insertion Loss
- ✓ Low VSWR




Specifications

PART NUMBER	WAYS	FREQUENCY RANGE	INSERTION LOSS (MAX)	VSWR (MAX)	POWER HANDLING (CW)		CONNECTOR TYPE
					Forward	Reverse	
MVE8261	8WAY	DC~8.0GHz	$\leq 18 \pm 1.5 \text{ dB @ DC-6GHz}$ $\leq 18 \pm 2.0 \text{ dB @ 6-8GHz}$	$\leq 1.2:1 \text{ @ DC-6GHz}$ $\leq 1.4:1 \text{ @ 6~8GHz}$	$\leq 1\text{W}$	$\leq 0.1\text{W}$	SMA FEMALE

Tolerance: $\pm 0.5\text{mm}$

Outline Drawing (Unit: mm)

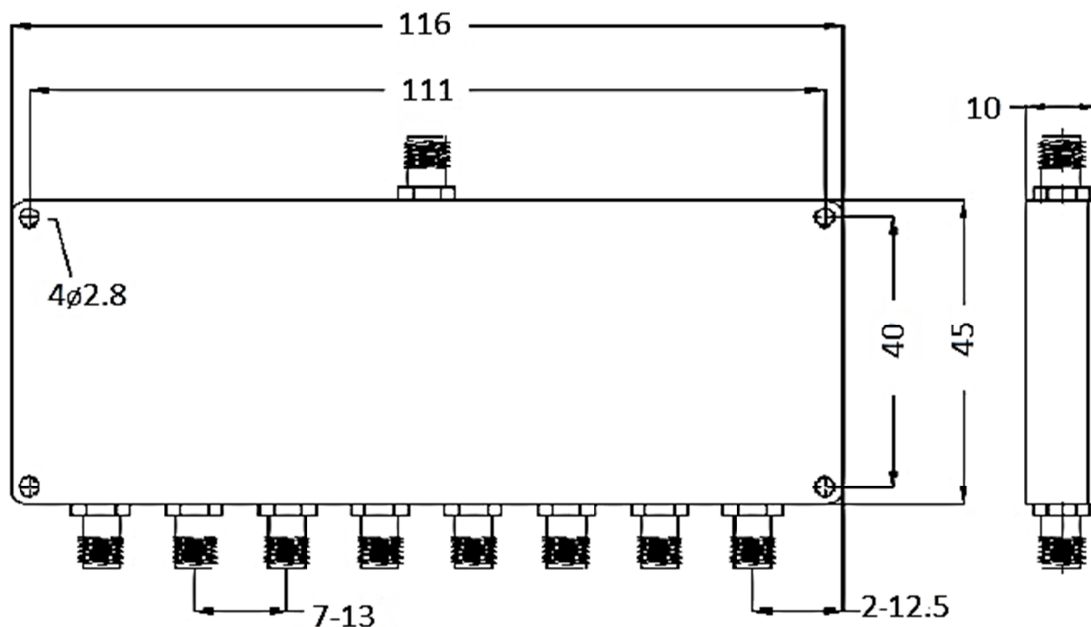

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

