

COAXIAL ADAPTER

2.92mm-2.92mm Precision Series

Features

- ✓ Frequency up to 40GHz
- ✓ Low VSWR
- ✓ 2.92mm Interface




Specifications

PART NUMBER	MVE1182B
DESCRIPTION	2.92mm Male To 2.92mm Male, 40GHz Adapter / Stainless
ELECTRICAL	FREQUENCY: DC-40GHz IMPEDANCE: 50Ω VSWR: 1.15:1 MAX. TEMPERATURE: -55~+165°C
MATERIALS	BODY: STAINLESS STEEL, PASSIVATED INSULATOR: PEI PIN CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED

TOLERANCE: X=±0.5 X.X=±0.2 .XX=±0.1

Outline Drawing: (mm)

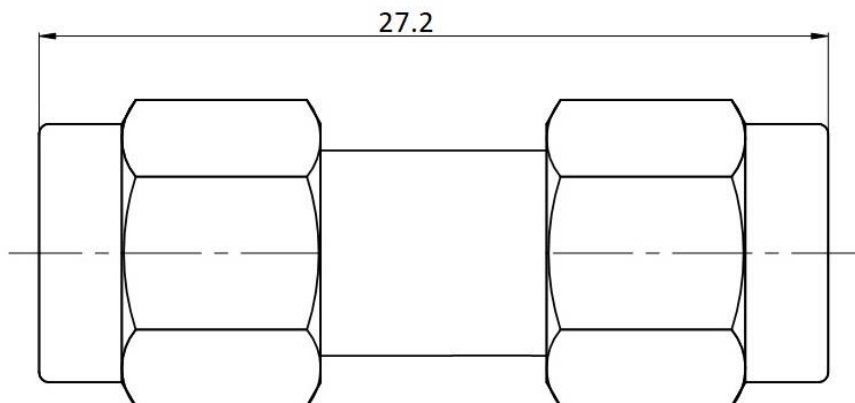

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY



Typical Test Result

