

COAXIAL ADAPTER

2.4mm-SMPM Precision Series

Features

- ✓ Frequency up to 50GHz
- ✓ Low Insertion Loss
- ✓ Low VSWR




Specifications:


PART NUMBER	MVE1131
DESCRIPTION	2.4mm Male To SMPM Male(Full Detent), 50GHz Adapter/ Stainless
ELECTRICAL	FREQUENCY: DC-50GHz IMPEDANCE: 50Ω VSWR: 1.30:1 MAX. INSERTION LOSS: 2.0dB TEMPERATURE:-55°C~+165°C DURABILITY: 500CYCLE MIN.
MATERIALS	BODY: STAINLESS STEEL, PASSIVATED INSULATOR: PEI PIN CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED

TOLERANCE: X=±0.5 X.X=±0.2 .XX=±0.1

Outline Drawing (Unit: mm)

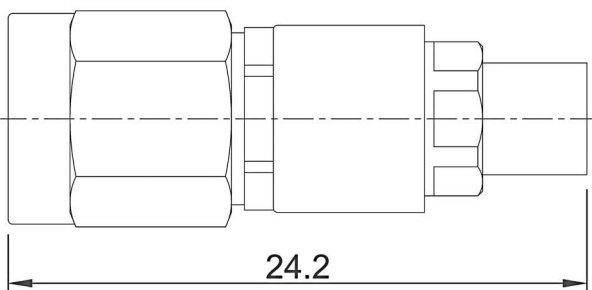

Typical Test Report

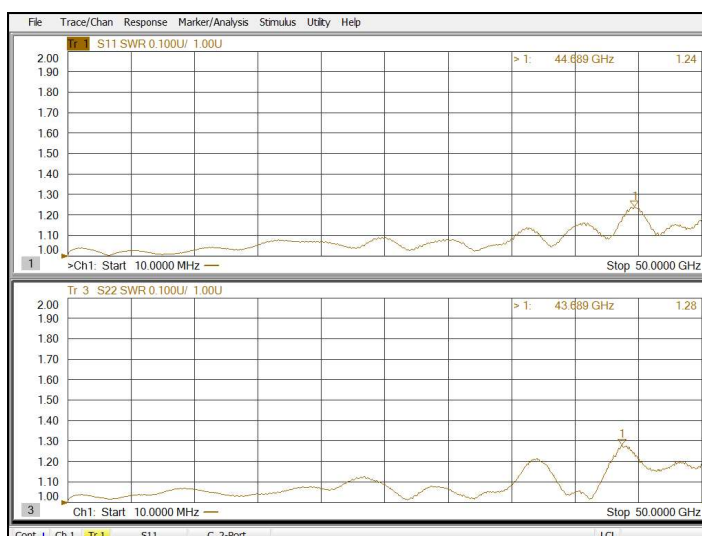

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

